

# *Hyacint*


*by Toomec of Sweden*



*H-616, H-610, H-608*

**Toomec AB**

## Hyacint

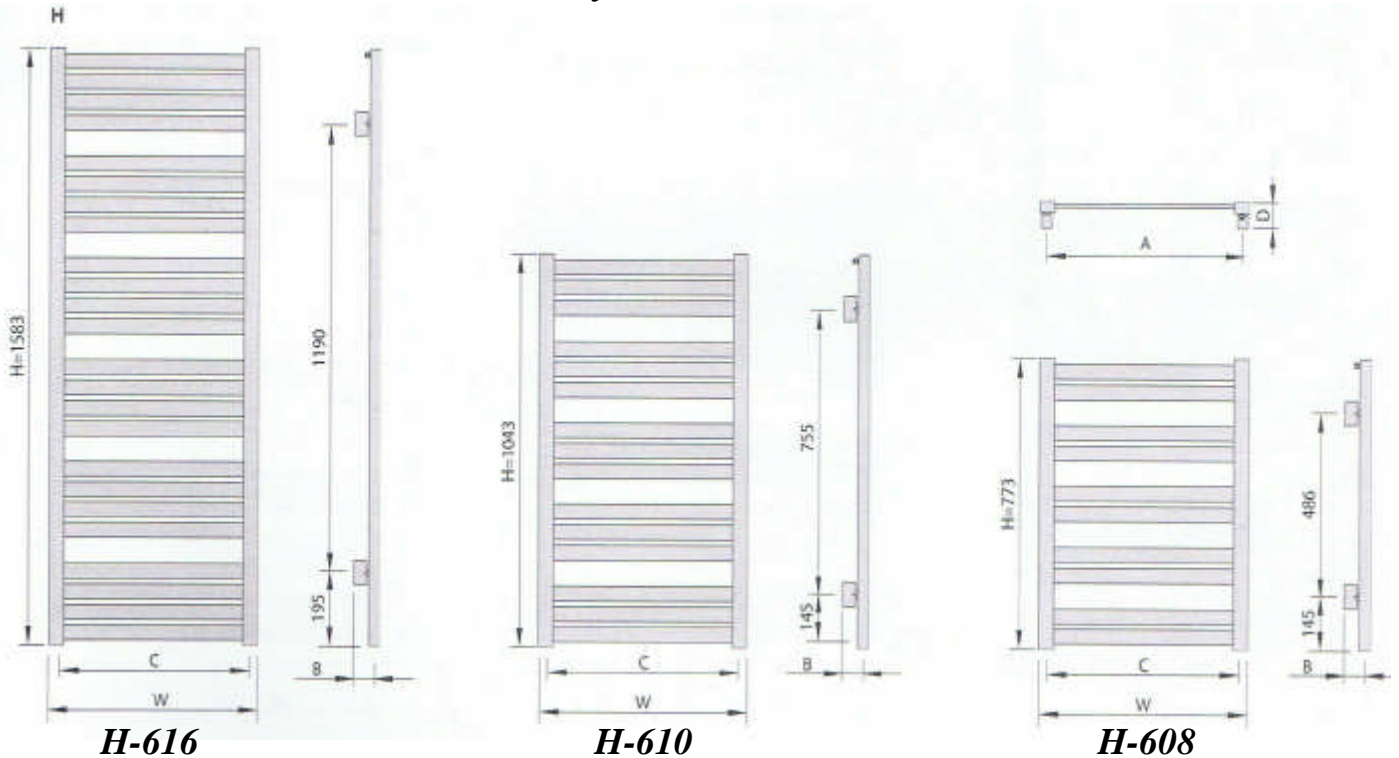

Hyacint – modeller i lack (H-)

| Modell | Bredd<br>(mm) | Höjd<br>(mm) | Djup<br>(mm) | Anslutn<br>C/C<br>(mm) | Anslutn<br>väggavst<br>(mm) | Vägg-<br>fästen<br>C/C (mm) | Värme-<br>yta<br>(m <sup>2</sup> ) | Vikt<br>(kg) | Kapa-<br>citet<br>(dm <sup>3</sup> ) | Effekt<br>(75/65/20<br>°C) (W) | Effekt<br>(75/65/24<br>°C) (W) | Effekt<br>(55/45/24<br>°C) (W) | Maxeffekt<br>elpatron<br>(W) |
|--------|---------------|--------------|--------------|------------------------|-----------------------------|-----------------------------|------------------------------------|--------------|--------------------------------------|--------------------------------|--------------------------------|--------------------------------|------------------------------|
|        | W             | H            | D            | C                      | B                           | A                           |                                    |              |                                      |                                |                                |                                |                              |
| H-608  | 555           | 773          | 65-70        | 515                    | 50-55                       | 515                         | 0,67                               | 7,9          | 2,8                                  | 348                            | 314                            | 156                            | 300                          |
| H-610  | 555           | 1043         | 65-70        | 515                    | 50-55                       | 515                         | 0,97                               | 11,4         | 3,9                                  | 495                            | 446                            | 219                            | 300                          |
| H-616  | 555           | 1583         | 65-70        | 515                    | 50-55                       | 515                         | 1,53                               | 17,7         | 6,1                                  | 763                            | 688                            | 337                            | 600                          |


### Horisontella profiler



### Lodräta profiler



### Anslutningar



-invändig gänga G 1/2"  
-luftningsventil G 1/8"

**Uppvärmning:** -vattenburen. Ej VVC.  
-vattenburen komb med elpatron  
-enbart elpatron

**Ytbehandling:** vit lack (blank eller matt)  
svart lack  
silvermetallic  
grafitlack

**Garanti:** 5 år

**Arbetsstryck:** 4 bar (alla modeller)

**Max temp:** 95 °C

**Elpatron med termo-  
stat, med eller utan  
tidsstyrning:** beställs separat

**Radiatorventil:  
(ettålsventil)** beställs separat