

Quatro


by Toomec of Sweden



Q-616, Q-611, Q-608

Toomec AB

Quatro

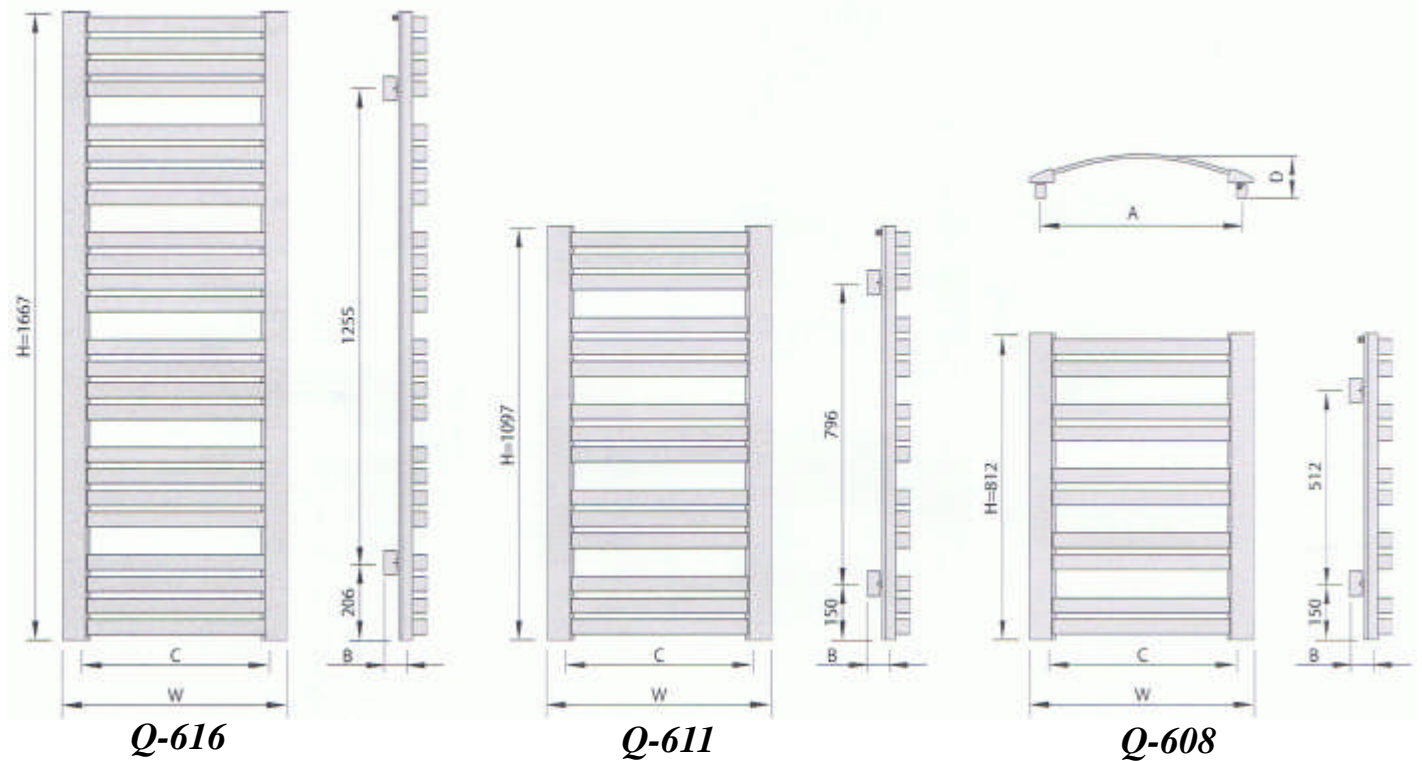


Quatro – modeller i lack (Q-)

Modell	Bredd (mm)	Höjd (mm)	Djup (mm)	Anslutn C/C (mm)	Anslutn väggavst (mm)	Vägg- fästen C/C (mm)	Värme- yta (m ²)	Vikt (kg)	Kapa- citet (dm ²)	Effekt (75/65/20 °C) (W)	Effekt (75/65/24 °C) (W)	Effekt (55/45/24 °C) (W)	Maxeffekt elpatron (W)
	W	H	D	C	B	A							
Q-608	595	812	101-106	500	52-57	525	0,75	10,2	3,5	392	354	176	300
Q-611	595	1097	101-106	500	52-57	525	1,08	14,4	4,9	553	498	245	300
Q-616	595	1667	101-106	500	52-57	252	1,7	22,2	7,7	849	765	375	600

Horisontella profiler



Lodräta profiler



Anslutningar



invändig gänga G 1/2"

luftningsventil G 1/8"

Uppvärmning:
-vattenburen. Ej VVC.
-vattenburen komb med elpatron
-enbart elpatron

Ytbehandling:
vit lack (blank eller matt)
svart lack
grafitlack
silvermetallic

Garanti: 5 år

Arbetsstryck: 4 bar (alla modeller)

Max temp: 95 °C

**Elpatron med termo-
stat, med eller utan
tidsstyrning:** beställs separat

**Radiatorventil:
(ettålsventil)** beställs separat